




The Driller's Choice

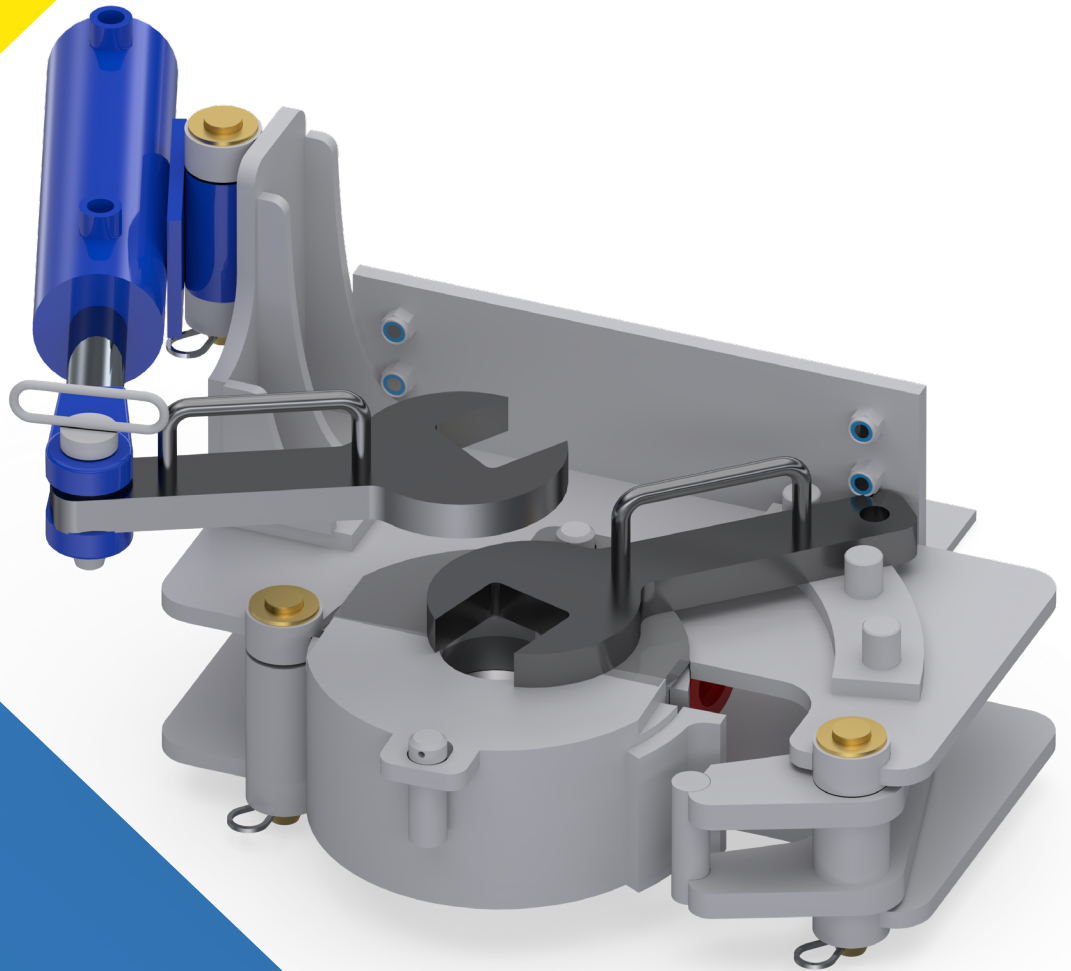

# GATE CLAMPS WITH BREAKOUT WRENCH

STANDARD CLAMPING SYSTEMS



[mincon.com](http://mincon.com)



## GATE CLAMPS

A max 8.8" ID for casings and min 1" ID for drill rods. The Gate Clamps come with a hydraulic breakout cylinder and two rod wrenches sized to the customers drill rods. The rods guides or 'slips' are also sized to fit the drill rods or casings as required. Capable of gripping both steel and PVC casings.



## SPECIFICATIONS

### Clamp Specifications

	IMPERIAL	METRIC
MAX ID	8.8"	223 mm
MIN ID	1"	25 mm – slips required
WEIGHT	212 lbs	96 kg
BREAKOUT TORQUE	17,000 ft.lbs	23,050 Nm
SLIPS INCLUDED	1 x Set. (Customer to specify size)	
WRENCHES INCLUDED	1 x Set. (Customer to specify size)	

### Operating Specifications

	IMPERIAL	METRIC
PRESSURE	2,900 psi	200 bar
FLOW	3.5 gpm	13 l/min
MOUNT TYPE	8-Bolt Back/Bottom Plate	
CYLINDERS INCLUDED	2 – Main Clamp & Breakout Wrench	

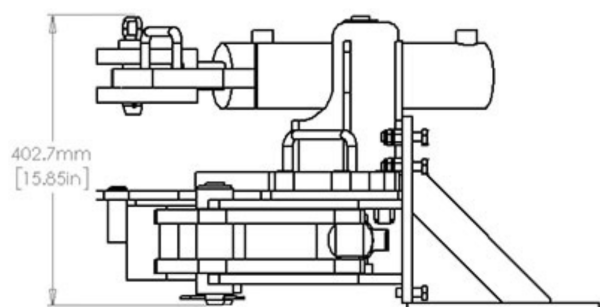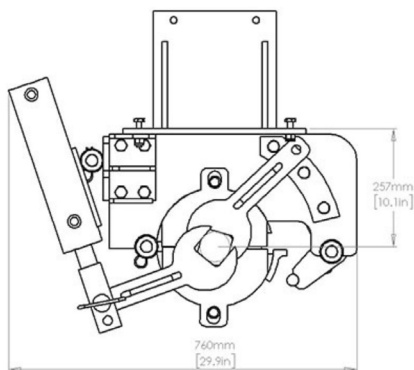

A large, stylized blue 'M' graphic is centered on the page. The interior of the 'M' is filled with a collage of industrial images showing various mechanical components, including drill bits, drill chucks, and parts of drilling rigs, some of which are painted yellow.

# The Driller's Choice

**MINCON INC**  
603 Centre Ave NW, Roanoke,  
VA 24016, USA  
T. +1 540-344-9939  
E. [salesusa@mincon.com](mailto:salesusa@mincon.com)  
W. [mincon.com](http://mincon.com)

AMERICAS REGION · EUROPE AND MIDDLE EAST REGION · AFRICA REGION · ASIA PACIFIC REGION