



SKID STEER ATTACHMENTS

WORD Rock Drills

SS SERIES

Custom built to fit your skid steer model, the WORD Skid Steer Attachment offers solutions for a variety of rock drilling applications. With a devotion to quality and timely delivery, WORD Rock Drills is dedicated to delivering your perfect machine when and where you need it. We strive daily to deliver our attachments to the necessity of our customer while maintaining the quality of our product.

SKID STEER ATTACHMENT KEY FEATURES:

- 2 Side Drilling Accessibility
- Variety of Feed Lengths Available
- Optional Radio Remote Control Available
- Interchangeable Drifters
- Utilizes Hydraulic Auxiliary of Skid Steer




DRILL PURCHASE INCLUDES:

- On-Site Installation
- Drill Training and Certification (Upon Request)
- Over the Phone Support
- Access to Thousands of In-Stock Parts Ready to Ship

APPLICATIONS & VERASTILITY

QUICK CHANGE DRIFTER MOUNTING

Each WORD Drill Attachment is equipped with a Quick Change Mounting System. This system allows you to switch between multiple drifter, allowing one machine to perform multiple types of work.

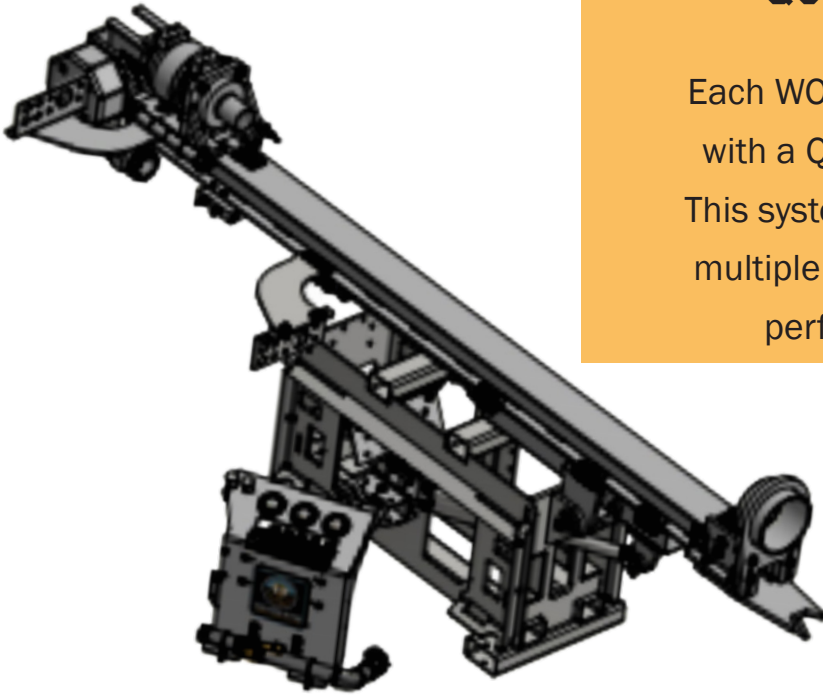


ACCESSORY OPTIONS

- Stability Kick Stands
- Breaker Bench
- Dust Suppression System
- Radio Remote Control
- Angle Indicator
- Down the Hole Hammer and Bits
- Clamp, Clamp & Breaker
- Manual Centralizer
- Pressure Washer Attachment

DRIFTER OPTIONS


M057

Rotation Torque: UP TO 3,316 FT/LB
Max. Rotation Pressure: 310 BAR / 4500 PSI
Rotation Speed: 500 RPM
Weight: 143 LBS
Shank Size: 3 3/8" API

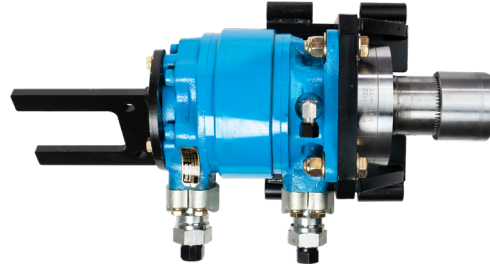


M0125

Rotation Torque: UP TO 14,400 FT/LB
Max. Rotation Pressure: 310 BAR / 4500 PSI
Rotation Speed: 300 RPM
Weight: 300 LBS
Shank Size: 2 7/8" API

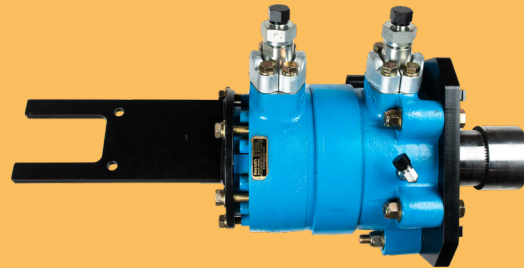

DF530X

Rotation Torque: 34-198 FT/LB
Max. Rotation Pressure: 140 BAR / 2031 PSI
Rotation Speed: 300 RPM
Weight: 121 LBS
Shank Size: 4 1/4" * 7/8" or 1"

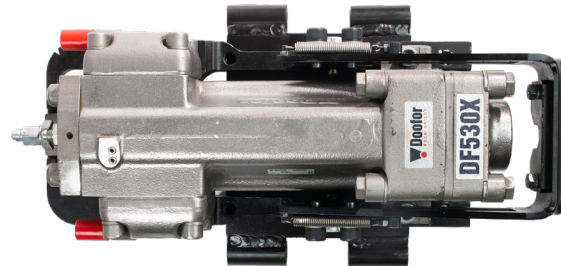


5025-150

Rotation Torque: 4500 FT/LB
Max. Rotation Pressure: 3000 PSI
Rotation Speed: 28 RPM
Weight: 120 LBS
Shank Size: Hex



DF540

Rotation Torque: 372-719 FT/LB
Max. Rotation Pressure: 175 BAR / 2440 PSI
Rotation Speed: 0-250 RPM
Weight: 291 LBS
Shank Size: R32, R38, T38, T45

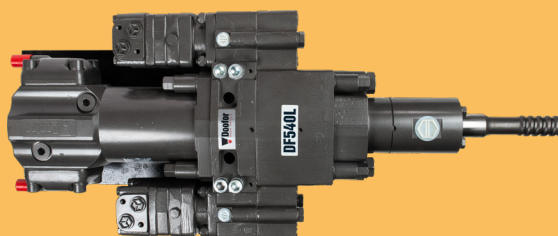

S83F

Rotation Torque: 70 FT/LB
Max. Rotation Pressure: ---
Rotation Speed: 120 RPM
Weight: 80 LBS
Shank Size: 7 7/8" API or 1" x 4 1/4" Hex





"In the begining was the Word, and the Word was with God, and the Word was God. 2 He was in the beginning with God. 3 All things were made through him, and without him was not any thing made that was made. 4 In him was life, and the life was the light of men. 5 The light shines in the darkness, and the darkness has not overcome it."

JOHN 1:1-8