



EX 224 - S200

EXCAVATOR ATTACHMENT



TECHNICAL SPECIFICATIONS

Excavator size	> 12 ton
Drill mast	S200 Gear Box
Stroke	Standard for rod 3300 mm
Pull back / down	2.500 Kg
Base frame and Kinematic	Include plate to attach to your excavator with: • Single slew WDL 343 for mast rotation (180°+180°) • Back feed 700 mm • Front or side mounting
Hydraulics	5 proportional valves (rotation/ percussion/ feed/ slew/ back feed)
Controls	Radio remote control and LCD screen for diagnostic and setting
Centralizer	Manual centralizer included
Data log	On request

MAIN FRAME ACCESSORIES AND OPTIONS

- 90° cylinder mounted before slew for extra mast inclination
- Extra slew WDL 343 DM unit with 90° structure for extra mast inclination
- Spider excavator foot

DRILL MAST ACCESSORIES AND OPTIONS




Clamp and break device	• 50-156; 54-180K • Manual centralizer for 2", 3" or 4"
Water pump	25 lt at 40 bars
Lubricator	1 lt – 8 lt

ROTARY HEADS AND DRIFTERS

Rotary heads	RP100 - RP200 - RP500
Drifters	• EURODRILL RH1X –RH2X – RH3X – RH4X • Floating spindle kit for DTH available • Doofor 430X - 530X - 538L - 550L - 560L



DIMENSIONS

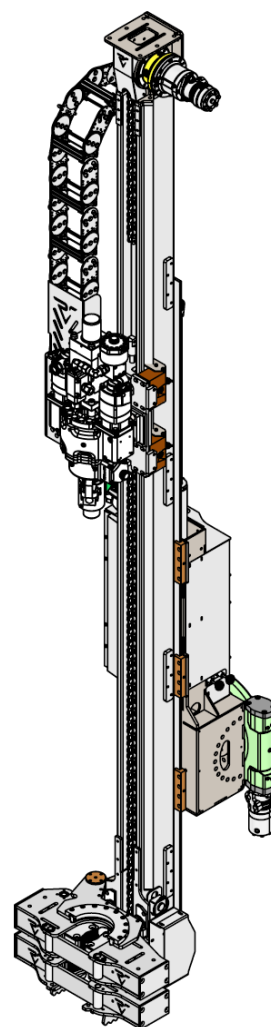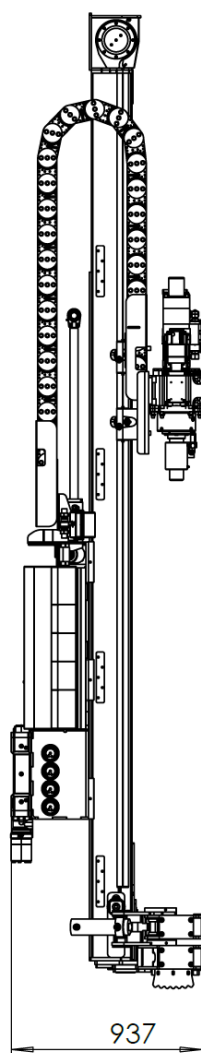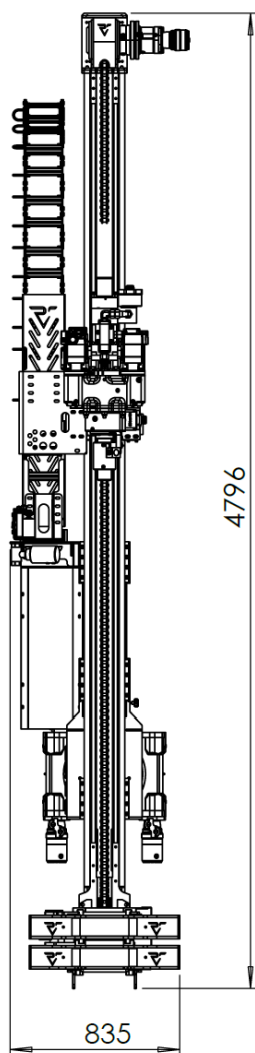

ESTIMATED WEIGHT: 1300 Kg

Tel. +39 0323 8211

Fax: +39 0323 836147

Sede: Via Strada Romana di Sotto,27
28877 Ornavasso (VB), Italy

info@ripamonti.net

www.ripamonti.net

